



PCF Tees



Straight Tees (T.S)



Reducer Tees (T.S)


● Tube Size

Type	Size	OD1	T1	OD2	T2	L1	L2	C	M
PCFT 1/4"	1/4"	6.35	1.0	1/4"	1.0	25.0	25.0	35.0	35.0
PCFT 3/8" × □	3/8"	9.35	1.0	3/8" - 1/4"	1.0	25.0	25.0	39.0	39.0
PCFT 1/2" × □	1/2"	12.7	1.24	1/2"	1.24	25.0	25.0	40.0	40.0
				3/8" - 1/4"	1.0	25.0	25.0	40.0	40.0
PCFT 3/4" × □	3/4"	19.05	1.24	3/8" - 1/4"	1.0	36.0	29.0	50.0	50.0
				1/2"	1.24	36.0	29.0	50.0	50.0
				3/4"	1.24	36.0	36.0	55.0	55.0

● Pipe Size

Type	Size	OD1	T1	OD2	T2	L1	L2	C	M
PCFT 15A × □	15A	21.7	1.65	3/8" - 1/4"	1.0	36.0	29.0	50.0	50.0
				1/2"	1.24		29.0	50.0	50.0
				3/4"	1.24		36.0	55.0	55.0
				15A	1.65		36.0	55.0	55.0
PCFT 20A × □	20A	27.2	1.65	3/8" - 1/4"	1.0	36.0	29.0	50.0	50.0
				1/2"	1.24		29.0	50.0	50.0
				3/4"	1.65		36.0	55.0	55.0
				20A - 15A	1.65		36.0	55.0	55.0
PCFT 25A × □	25A	34.0	1.65	3/8" - 1/4"	1.0	36.0	29.0	50.0	55.0
				1/2"	1.24		29.0	50.0	55.0
				3/4"	1.24		36.0	60.0	60.0
				25A - 20A - 15A	1.65		36.0	60.0	60.0
PCFT 32A × □	32A	42.7	1.65	3/8" - 1/4"	1.0	46.0	29.0	60.0	60.0
				1/2"	1.24		29.0	60.0	60.0
				3/4"	1.24		36.0	70.0	70.0
				25A - 20A - 15A	1.65		36.0	70.0	70.0
				32A	1.65		46.0	75.0	75.0
PCFT 40A × □	40A	48.6	1.65	3/8" - 1/4"	1.0	46.0	29.0	60.0	60.0
				1/2"	1.24		29.0	60.0	60.0
				3/4"	1.24		36.0	70.0	70.0
				25A - 20A - 15A	1.65		36.0	70.0	70.0
				40A - 32A	1.65		46.0	80.0	80.0
PCFT 50A × □	50A	60.5	1.65	3/8" - 1/4"	1.0	46.0	29.0	60.0	65.0
				1/2"	1.24		29.0	60.0	65.0
				3/4"	1.24		36.0	70.0	75.0
				25A - 20A - 15A	1.65		36.0	70.0	75.0
				40A - 32A	1.65		46.0	80.0	85.0
				50A	1.65		46.0	85.0	85.0
PCFT 65A × □	65A	76.3	2.1	3/8" - 1/4"	1.0	51.0	29.0	65.0	75.0
				1/2"	1.24		29.0	65.0	75.0
				3/4"	1.24		36.0	75.0	85.0
				25A - 20A - 15A	1.65		36.0	75.0	85.0
				50A - 40A - 32A	1.65		46.0	90.0	95.0
				65A	2.1		51.0	100.0	100.0
PCFT 80A × □	80A	89.1	2.1	3/8" - 1/4"	1.0	51.0	29.0	65.0	80.0
				1/2"	1.24		29.0	65.0	80.0
				3/4"	1.24		36.0	75.0	90.0
				25A - 20A - 15A	1.65		36.0	75.0	90.0
				50A - 40A - 32A	1.65		46.0	90.0	100.0
				65A	2.1		51.0	100.0	105.0
				80A	2.1		51.0	105.0	105.0
PCFT 100A × □	100A	114.3	2.1	3/8" - 1/4"	1.0	51.0	29.0	65.0	95.0
				1/2"	1.24		29.0	65.0	95.0
				3/4"	1.24		36.0	75.0	100.0
				25A - 20A - 15A	1.65		36.0	75.0	100.0
				50A - 40A - 32A	1.65		46.0	90.0	110.0
				80A - 65A	2.1		51.0	105.0	120.0
				100A	2.1		51.0	120.0	120.0

PCF Reducer




● Tube Size

Type	Size	OD1	T1	OD2	T2	Length of strait part		H
						L1	L2	
PCF RC 3/8" × 1/4"	3/8"	9.35	1.0	1/4"	1.0	25.0	25.0	75.0
PCF RC 1/2" × □	1/2"	12.7	1.24	3/8" - 1/4"	1.0	25.0	25.0	75.0
PCF RC 3/4" × □	3/4"	19.05	1.24	1/2"	1.24	36.0	25.0	100.0
				3/8" - 1/4"	1.0			

● Pipe Size

Type	Size	OD1	T1	OD2	T2	Length of strait part		H
						L1	L2	
PCF RC 15A × □	15A	21.7	1.65	3/8"	1.0	36.0	25.0	110.0
				1/2"	1.24		25.0	110.0
PCF RC 20A × □	20A	27.2	1.65	3/8"	1.0	36.0	25.0	120.0
				1/2"	1.24		25.0	120.0
				15A	1.65		36.0	120.0
PCF RC 25A × □	25A	34.0	1.65	1/2"	1.24	36.0	25.0	125.0
				20A - 15A	1.65		36.0	125.0
PCF RC 32A × □	32A	42.7	1.65	25A - 20A - 15A	1.65	46.0	36.0	139.0
PCF RC 40A × □	40A	48.6	1.65	25A - 20A	1.65	46.0	36.0	152.0
				32A	1.65		46.0	162.0
PCF RC 50A × □	50A	60.5	1.65	25A - 20A	1.65	46.0	36.0	164.0
				40A - 32A	1.65		46.0	174.0
PCF RC 65A × □	65A	76.3	2.1	50A - 40A - 32A	1.65	51.0	46.0	192.0
PCF RC 80A × □	80A	89.1	2.1	50A - 40A - 32A	1.65	51.0	46.0	192.0
				65A	2.1		51.0	197.0
PCF RC 100A × □	100A	114.3	2.1	50A - 40A	1.65	51.0	46.0	205.0
				80A - 65A	2.1		51.0	210.0


PCF Cap Reducer

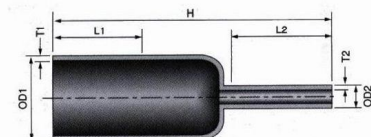

● Tube Size

Type	Size	OD1	T1	OD2	T2	Length of strait part		H
						L1	L2	
PCF CAP RC 32A × □	32A	42.7	1.65	3/8" - 1/4"	1.0	46.0	29.0	118.0
				1/2"	1.24		29.0	118.0
				3/4"	1.24		36.0	125.0
PCF CAP RC 40A × □	40A	48.6	1.65	3/8" - 1/4"	1.0	46.0	29.0	118.0
				1/2"	1.24		29.0	118.0
				3/4"	1.24		36.0	125.0
				15A	1.65		36.0	125.0
PCF CAP RC 50A × □	50A	60.5	1.65	3/8" - 1/4"	1.0	46.0	29.0	118.0
				1/2"	1.24		29.0	118.0
				3/4"	1.24		36.0	125.0
				15A	1.65		36.0	125.0
PCF CAP RC 65A × □	65A	76.3	2.1	3/8" - 1/4"	1.0	51.0	29.0	123.0
				1/2"	1.24		29.0	123.0
				3/4"	1.24		36.0	130.0
				25A - 20A - 15A	1.65		36.0	130.0
PCF CAP RC 80A × □	80A	89.1	2.1	3/8" - 1/4"	1.0	51.0	29.0	135.0
				1/2"	1.24		29.0	135.0
				3/4"	1.24		36.0	142.0
				25A - 20A - 15A	1.65		36.0	142.0
PCF CAP RC 100A × □	100A	114.3	2.1	3/8" - 1/4"	1.0	51.0	29.0	157.0
				1/2"	1.24		29.0	157.0
				3/4"	1.24		36.0	164.0
				25A - 20A - 15A	1.65		36.0	164.0
				32A	1.65		46.0	174.0

PCF Elbow



● Tube Size

Type	Size	OD	T	L	R	A
PCF 90E 1/4"	1/4"	6.35	1.0	29.0	9.53	40.0
PCF 90E 3/8"	3/8"	9.53	1.0	29.0	14.3	45.0
PCF 90E 1/2"	1/2"	12.7	1.24	29.0	15.3	50.0
PCF 90E 3/4"	3/4"	19.05	1.24	36.0	19.05	60.0

● Pipe Size

Type	Size	OD	T	L	R	A
			5S			
PCF 90E 15A	15A	21.7	1.65	27	38.1	65.0
PCF 90E 20A	20A	27.2	1.65	32	38.1	70.0
PCF 90E 25A	25A	34.0	1.65	37	38.1	75.0
PCF 90E 32A	32A	42.7	1.65	39	47.6	90.0
PCF 90E 40A	40A	48.6	1.65	43	57.2	100.0
PCF 90E 50A	50A	60.5	1.65	39	76.2	115.0
PCF 90E 65A	65A	76.3	2.1	45	114.3	160
PCF 90E 80A	80A	89.1	2.1	66	114.3	180
PCF 90E 100A	100A	114.3	2.1	38	153.4	190